Chapter 04 Screen Adjustment

On-Screen Display Menu Introduction

PICTURE



COLOR EFFECT




GameMode: Standard/ RTS/ FPS


INFORMATION



RESET



ADVANCE



OPTION



TEMPERATURE



Temperature: User/ 9300/ 7500 / 6500/ 5800/ sRGB

OSD SETTING




Chapter 05 Setting Up(Windows10)

Extend Mode / Duplicate Mode/ Display Mode

Set via Windows key +P keyboard shortcut

A: Enter the"Windows" key and "P" keyboard at the same time.

B: select an option from the drop-down list to determine how your desktop will display across your screens.




Rotate the Screen

1: Right-click anywhere on your desktop and select Display settings to open the Display page.

2: Under the "Select and rearrange displays" section, select the monitor that you want to adjust.

3: Under the "Scale and layout" section, use the Orientation drop-down menu to select Landscape or Portrait screen.



Chapter 06 Q&A

Q: Why doesn't my monitor turn on?

A: 1. Check if your device's Type-C port is full-featured (supports both power and video). If not, please use an HDMI to Mini HDMI cable for video and a USB-C cable for power.

2. Ensure sufficient power supply. The monitor requires at least PD 18W. For stable performance, especially at higher brightness, use an external PD power adapter.

3. If the issue persists, please contact us at support@uperfect.com.

Q: The monitor says "No Signal". What should I do?

A:1. When using USB-C, make sure your device supports USB 3.1 / Thunderbolt 3.

2. Always use the original factory-packed cables.

3. Try connecting another device. If the issue continues, please contact us for a replacement.

Q: Why does my monitor flicker or shut off when brightness is increased?

A: This is usually caused by insufficient power supply. Please use the original cables and connect to an external PD power adapter (≥18W recommended).

Q: Can I power the monitor with a power bank?

A: Yes, but the power bank must provide at least 18W output. Since the included adapter is 15W, we recommend using a 18W or higher power bank for reliable use.

Q: Will my brightness/contrast settings be saved after shutdown?

A: 1. If the monitor is connected via HDMI (video) + PD port (power), settings such as brightness and volume will be saved automatically.

2. If connected via Type-C without external power, settings will reset after shutdown. This design prevents issues with phones that cannot supply enough power. 👉To keep your settings saved, please provide continuous power through the PD port.

Q: The power indicator is on, but the screen stays black. What should I do?

A: 1. Use the factory-packed cables.

2. Check if there is a valid video signal transmission.

3. Switch display mode (try Duplicate/Mirror instead of Extended).

4. Try another device.

5. If the problem remains, please contact us.

Q: Is this monitor eye-friendly for long-time use?

A: Yes, it is equipped with flicker-free technology and a blue light filter, helping reduce eye strain during extended sessions.

Important Reminder:

💡 If you encounter any problems, please contact us at support@uperfect.com before returning the product. We will provide solutions, replacements, or refunds to ensure your satisfaction.

UPERFECT® Portable Monitor

User Manual



In order to ensure your safe use of this product, please read this manual carefully before using this product and keep it properly.

Email: support@uperfect.com

PDS-230

Chapter 01 Preparations

Checking the Package Contents


Portable Monitor


Power Adapter


User Guide


Mini HDMI Cable


Type-c to Type-c Cable

Note:

•If any of the above items is damaged or missing, please contact us immediately. (support@uperfect.com)

•The appearance of the components may differ from the images shown.

Installing the stand case






The bracket supports 180° opening up.

0°~180° Adjustable

Interface Function Introduction

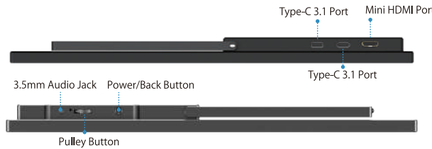

1. Power / Back Button

Long press the Power/ Back button for 3 seconds to turn on/o- the monitor.
Short press the Power/Back button to go into Menu.Short press the Power/Back button to return to the homepage.

2. Pulley / Menu / Enter Button

Press this button to enter OSD menu, Scroll this button up and down to adjust brightness or volume.

3. HP

Headphone Jack

4. Mini HDMI Port

Audio and Video signal transmission

5&6. Type C 3.1 Port

For signal and power transmission

7. VESA

4-M4*4mm VESA holes

Chapter 02 Specifications

Size	17.5 inches
Color	Black
Resolution	1920*1200
Refresh Rate	60 HZ
Aspect Ratio	16:10
VESA Standard	75mm*75mm M4*4mm
Interface	Mini HDMI Port
	Type C 3.1 Port * 2
	3.5mm Audio Jack
Panel Type	IPS

Chapter 03 Connecting


TYPE-C signal transfer

Note: Note: For a more stable power supply, it is recommended to use our original power adapter to power.



HDMI signal transfer

Note: Note: For a more stable power supply, it is recommended to use our original power adapter to power.

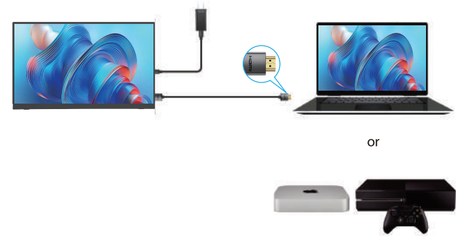

Chapter 07 Service Support

Dear Customer,
Thank you for purchasing the Portable USB Monitor!
We offer 100% money back guarantee in 30 days and 90 days replacement, 12 month warranty for any issue, professional tech support to ensure no-worry service.
Any query or problem, please contact us via

support@uperfect.com

